


SINGLE ROW RADIAL BALL BEARINGS

SERIES 6400A

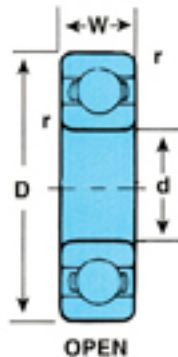

SST Bearing No.	Bore d		Outer Diameter D		Width W		Radius r		Basic Load Rating lbs.		Weight lbs.
	mm	in.	mm	in.	mm	in.	mm	in.	Dynamic C	Static C_0	
6403 A	17	.6693	62	2.4409	17	.6693	1.0	.039	5100	2420	.60
6404 A	20	.7874	72	2.8346	19	.7480	1.0	.039	6400	3150	.90
6405 A	25	.9843	80	3.1496	21	.8268	1.5	.059	4750	2460	1.19
6406 A	30	1.1811	90	3.5433	23	.9055	1.5	.059	9750	5350	1.59
6407 A	35	1.3780	100	3.9370	25	.9843	1.5	.059	12400	7000	2.06
6408 A	40	1.5748	110	4.3307	27	1.0630	2.0	.079	14300	8200	2.69
6409 A	45	1.7717	120	4.7244	29	1.1417	2.0	.079	17300	10100	3.41
6410 A	50	1.9685	130	5.1181	31	1.2205	2.0	.079	18700	11100	4.20
6411 A	55	2.1654	140	5.5118	33	1.2992	2.0	.079	20000	12100	5.13
6412 A	60	2.3622	150	5.9055	35	1.3780	2.0	.079	22900	14400	6.22
6413 A	65	2.5591	160	6.2992	37	1.4567	2.0	.079	24900	16200	7.44
6414 A	70	2.7559	180	7.0866	42	1.6535	2.5	.098	28800	20100	11.0
6415 A	75	2.9528	190	7.4803	45	1.7717	2.5	.098	31000	22300	13.1
6416 A	80	3.1496	200	7.8740	48	1.8898	2.5	.098	37000	28200	15.3
6417 A	85	3.3465	210	8.2677	52	2.0472	3.0	.118	37000	28700	18.8
6418 A	90	3.5433	225	8.8583	54	2.1260	3.0	.118	41500	35500	25.4