


SINGLE ROW RADIAL BALL BEARINGS

SERIES 6400

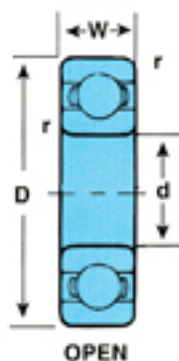

SST Bearing No.	Bore d		Outer Diameter D		Width W		Radius r		Basic Load Rating lbs.		Weight lbs.
	mm	in.	mm	in.	mm	in.	mm	in.	Dynamic C	Static C_0	
6403	17	.6693	62	2.4409	17	.6693	1.0	.039	5100	2420	.60
6404	20	.7874	72	2.8346	19	.7480	1.0	.039	6400	3150	.90
6405	25	.9843	80	3.1496	21	.8268	1.5	.059	4750	2460	1.19
6406	30	1.1811	90	3.5433	23	.9055	1.5	.059	9750	5350	1.59
6407	35	1.3780	100	3.9370	25	.9843	1.5	.059	12400	7000	2.06
6408	40	1.5748	110	4.3307	27	1.0630	2.0	.079	14300	8200	2.69
6409	45	1.7717	120	4.7244	29	1.1417	2.0	.079	17300	10100	3.41
6410	50	1.9685	130	5.1181	31	1.2205	2.0	.079	18700	11100	4.20
6411	55	2.1654	140	5.5118	33	1.2992	2.0	.079	20000	12100	5.13
6412	60	2.3622	150	5.9055	35	1.3780	2.0	.079	22900	14400	6.22
6413	65	2.5591	160	6.2992	37	1.4567	2.0	.079	24900	16200	7.44
6414	70	2.7559	180	7.0866	42	1.6535	2.5	.098	28800	20100	11.0
6415	75	2.9528	190	7.4803	45	1.7717	2.5	.098	31000	22300	13.1
6416	80	3.1496	200	7.8740	48	1.8898	2.5	.098	37000	28200	15.3
6417	85	3.3465	210	8.2677	52	2.0472	3.0	.118	37000	28700	18.8
6418	90	3.5433	225	8.8583	54	2.1260	3.0	.118	41500	35500	25.4